
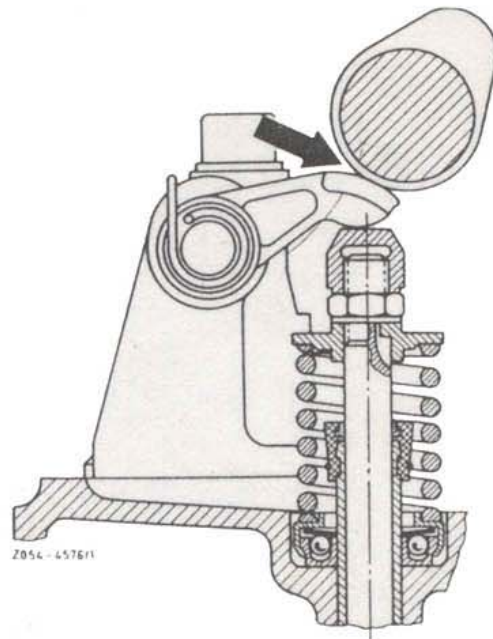


# 05-210 Inspection and adjustment of valve clearance

Valve clearance	with engine cold (approx. 20 °C)	with engine warm (60 °C ± 15 °C)
Intake	0.10 <sup>1)</sup>	0.15 <sup>1)</sup>
Exhaust	0.35	0.40

<sup>1)</sup> 0.05 mm higher during lasting outside temperatures below -20 °C.

Tightening torque	Nm
Nuts for cylinder head cover	15

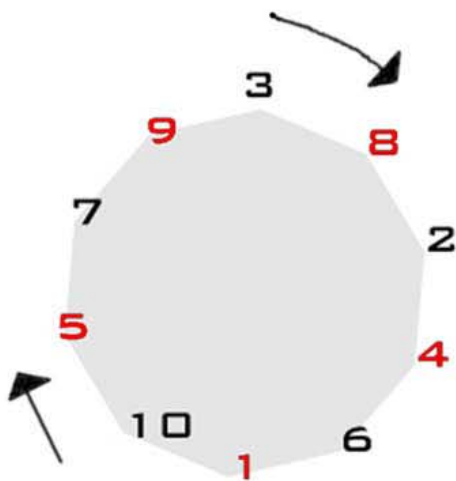

**INTAKE: 1.0 -> 1.5**

**EXHAUST: 3.5->4.0**

↑ Intake  
↑ Exhaust

